



KONVERTER DIMMBAR KONST. SPANNUNG

28-452893

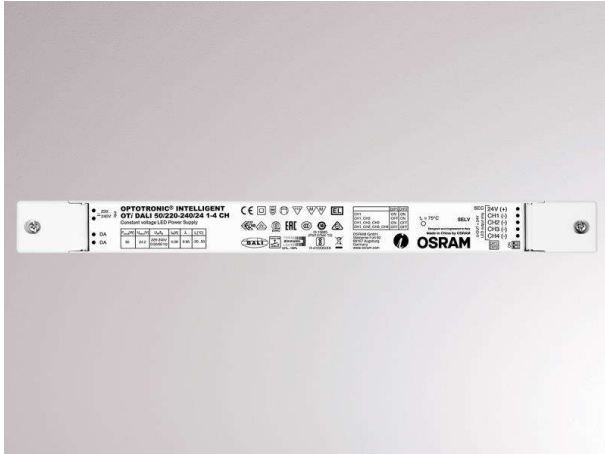

Wiring Diagram

Input  
 Gray 1 - Mains  
 Gray 2 - Mains  
 Gray 3 - n/a  
 Gray 4 - PE  
 White 5 - n/a  
 White 6 - DALI  
 White 7 - DALI




Output  
 Red 21 - LED+  
 Black 22 - LED-  
 Red 23 - LED+  
 Black 24 - LED-  
 White 25 - n/a  
 White 26 - LEDset  
 Black 27 - LEDset-aux

- Connectors type, both input and output: Wago 250
- Wires cross section: massive leads 0.5 - 1.5 mm<sup>2</sup> / flexible leads 0.5 - 1.5 mm<sup>2</sup>
- Wires peeling length: 8.5 - 9.5 mm

21 & 23 internally connected  
 22 & 24 internally connected  
 Load wires length: 2 m max

DRAWING

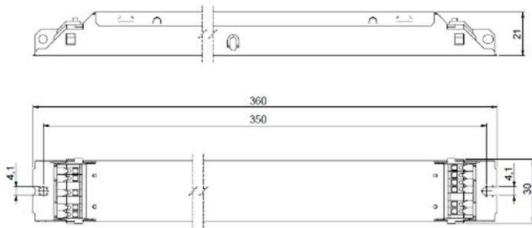

TECHNICAL DETAILS

Dimming	DALI, Push
Voltage [V]	220-240V 50/60Hz
Material	synthetic
Length [mm]	365
Width [mm]	32
Height [mm]	22
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,18
EAN-Number	4052899452893
Lifetime [h]	50 000
No. of luminaires B16A	10

LIGHT DISTRIBUTION CURVE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.