


MESSINA

44-24009mp


MESSINA PD SUSPENSION made of metal, natural anodised, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, dimmable not dimmable, cable transparent, adapter/ceiling base silver, pendant length 1500mm, IP20



DRAWING

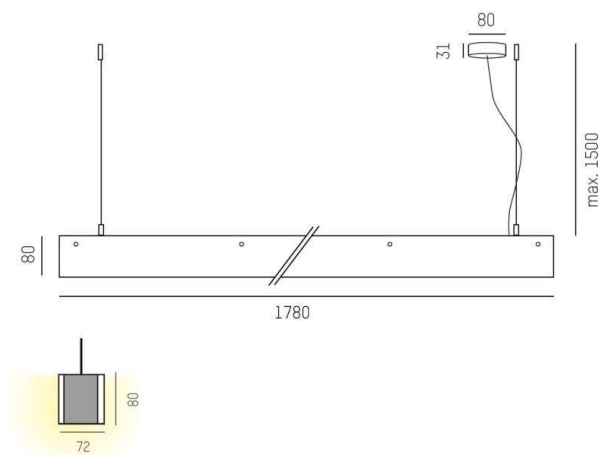

LIGHT DISTRIBUTION CURVE

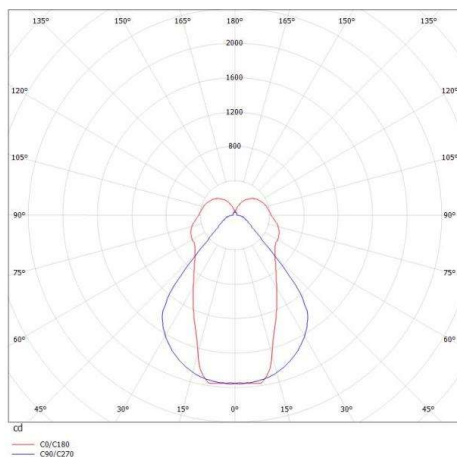

TECHNICAL DETAILS

System perform. [W]	39
Bulb type	LED
Luminous flux [lm]	5150
Colour temp. [K]	3000K
CRI	>80
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	metal

Length [mm]	1780
Width [mm]	72
Height [mm]	80
Pendant length [mm]	1500
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	13,43

Color lamp	natural anodised
Color adapter/ceiling base	silver
Electric wire	transparent
EAN-Number	9008905249570
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.