



**VOLTO COPERTO**

**539-010012023060**

VOLTO COPERTO SD WALL / CEILING LUMINAIRE made of die-cast aluminium, black anodised, similar to RAL 9005, satined PMMA diffuser cubic for homogeneous illumination satined, light output direct, with converter, dimmable not dimmable, IP20

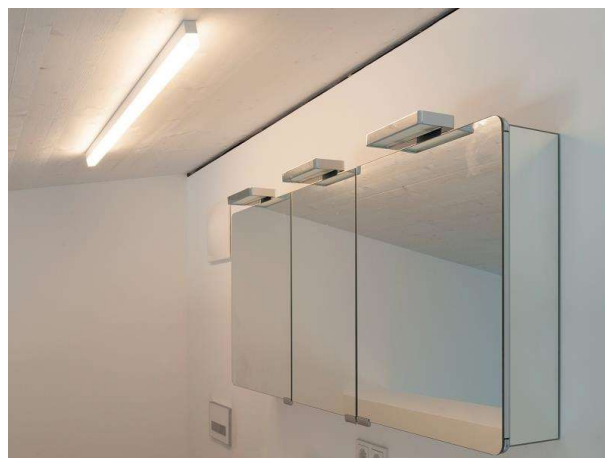


**DRAWING**

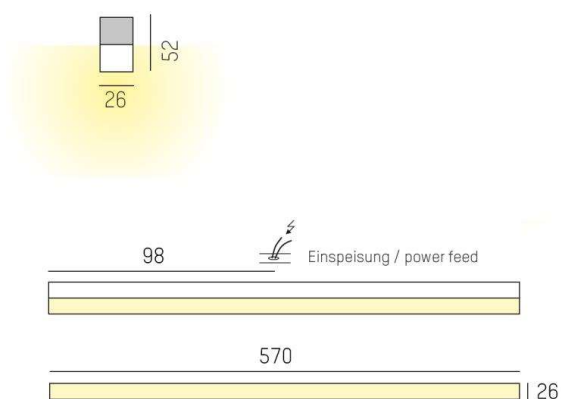

**TECHNICAL DETAILS**

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	680
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser cubic
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	570
Width [mm]	26
Height [mm]	52
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,78
Color lamp	black anodised
RAL	9005
Glass color	satined
EAN-Number	9008905687044
Lifetime [h]	L80 B10 50 000

**LIGHT DISTRIBUTION CURVE**

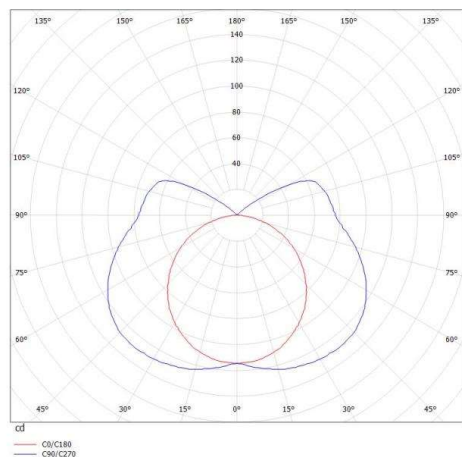

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.