


VOLTO COPERTO

539-010022024050


VOLTO COPERTO SD WALL / CEILING LUMINAIRE made of die-cast aluminium, white, similar to RAL 9016, satined PMMA diffuser cubic for homogeneous illumination satined, light output direct, with converter, dimmable not dimmable, IP20



DRAWING

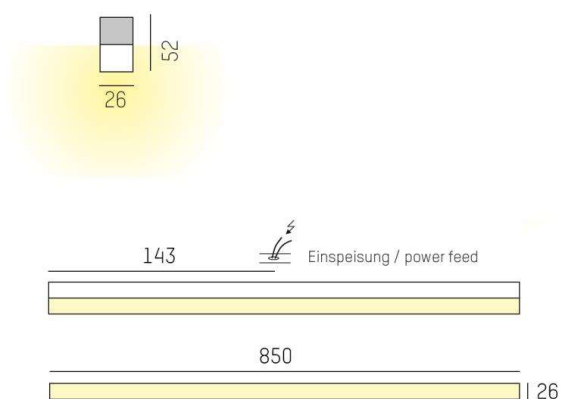

LIGHT DISTRIBUTION CURVE

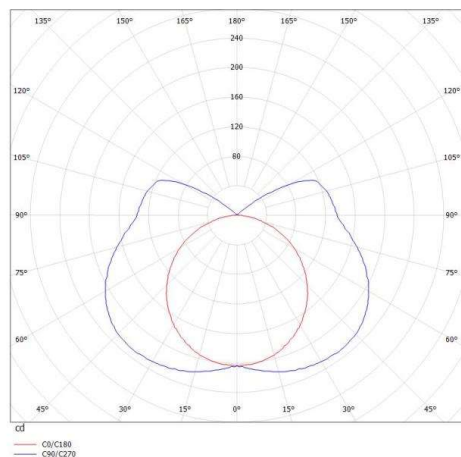

TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1210
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser cubic
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium

Length [mm]	850
Width [mm]	26
Height [mm]	52
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,32

Color lamp	white
RAL	9016
Glass color	satined
EAN-Number	9008905686641
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.