


LOG OUT UP & DOWN

581-411105mp

LOG OUT UP/DOWN PDI SUSPENSION made of die-cast aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, with converter, dimmable not dimmable, cable transparent, adapter/ceiling base white, pendant length 3000mm, IP20



DRAWING

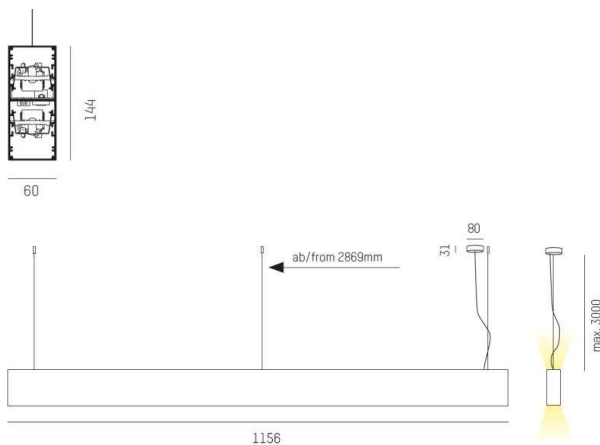


TECHNICAL DETAILS

System perform. [W]	54
Bulb type	LED
Luminous flux [lm]	4930
Colour temp. [K]	4000K
CRI	>80
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium

Length [mm]	1156
Width [mm]	60
Height [mm]	144
Pendant length [mm]	3000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	6,96

LIGHT DISTRIBUTION CURVE

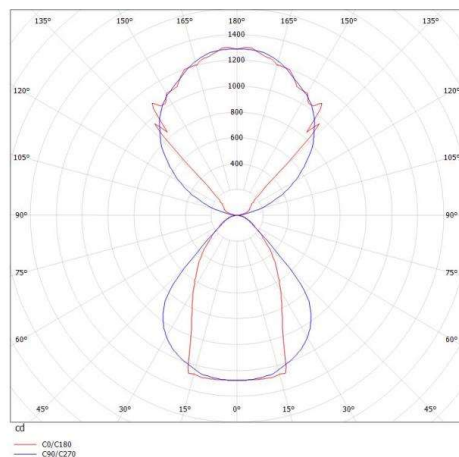

Color lamp	white
RAL	9016
Color adapter/ceiling base	white
Electric wire	transparent
EAN-Number	9008905215636
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.