


ONE ROW

639-nle115v1

ONE ROW LIGHT INSERT EMERGENCY LIGHT LIGHT INSERT made of metal, white, similar to RAL 9016, light output direct, with converter, through wiring
 $5 \times 2,5 \text{mm}^2 + 2 \times 1,5 \text{mm}^2 + 4 \times 1,5 \text{mm}^2$, IP20



DRAWING

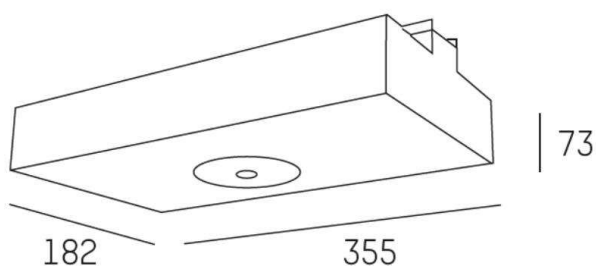


TECHNICAL DETAILS

| | |
|---------------------|--|
| System perform. [W] | 6 |
| Bulb type | LED |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Through wiring | $5 \times 2,5 \text{mm}^2 + 2 \times 1,5 \text{mm}^2 + 4 \times 1,5 \text{mm}^2$ |
| Material | metal |

| | |
|---------------------|------------------|
| Length [mm] | 355 |
| Width [mm] | 182 |
| Height [mm] | 73 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 2,92 |

| | |
|--------------|----------------|
| Color lamp | white |
| RAL | 9016 |
| EAN-Number | 9008905802768 |
| Lifetime [h] | L80 B10 50 000 |

LIGHT DISTRIBUTION CURVE

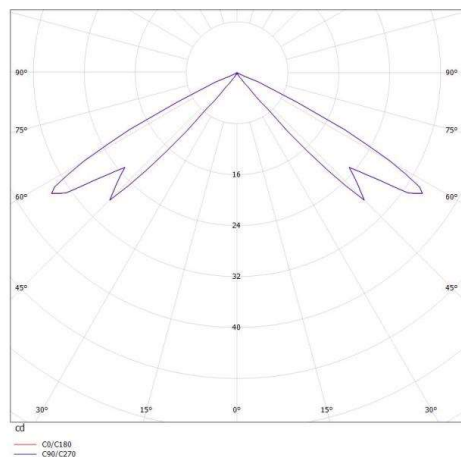

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.