


BLIND SPOT

640-00101032355

BLINDSPOT TURN R RECESSED SPOTLIGHT made of aluminium, white matt, similar to RAL 9016, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, UGR <16, swiveling 172°, tilting 30°, without converter, max. 700mA, IP20 Please order accessories separately




DRAWING

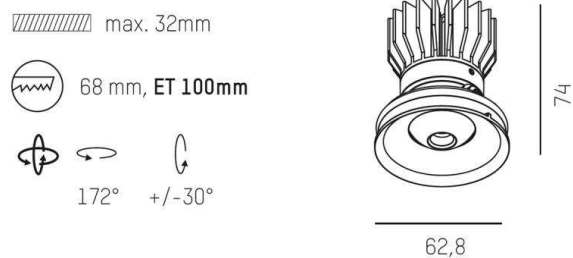

TECHNICAL DETAILS

| | |
|------------------------|-------------------|
| Bulb type | LED 9W |
| Luminous flux [lm] | 400 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| UGR | <16 |
| Optics | LFO lens |
| Designer | Serge Cornelissen |
| Converter | without converter |
| Light output | direct |
| Beam angle [°] | 55° |
| Material | aluminium |
| Height [mm] | 74 |
| Diameter [mm] | 62,8 |
| Ceiling cutout [mm] | 68 |
| Ceiling thickness [mm] | 32 |
| Recess depth [mm] | 100 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,28 |
| Color lamp | white matt |
| RAL | 9016 |
| EAN-Number | 9008905740329 |
| Lifetime [h] | L80 B10 50 000 |

LIGHT DISTRIBUTION CURVE

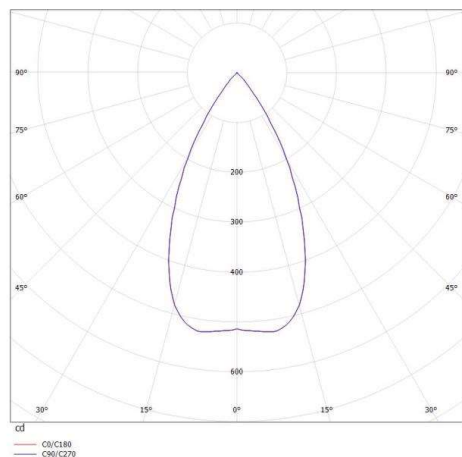

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.