


**BLIND SPOT**

**640-00101032966**

BLINDSPOT TURN R RECESSED SPOTLIGHT made of aluminium, black matt, similar to RAL 9005, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, UGR <16, swiveling 172°, tilting 30°, without converter, max. 700mA, IP20 Please order accessories separately




**DRAWING**

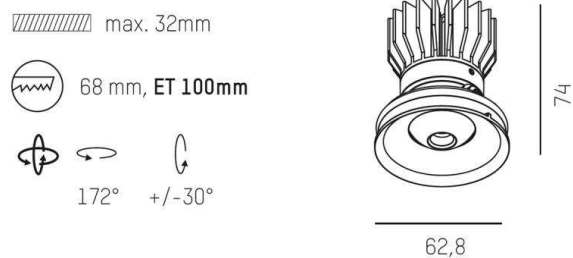

**TECHNICAL DETAILS**

Bulb type	LED 9W
Luminous flux [lm]	430
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>90
UGR	<16
Optics	LFO lens
Designer	Serge Cornelissen
Converter	without converter
Light output	direct
Beam angle [°]	55°
Material	aluminium
Height [mm]	74
Diameter [mm]	62,8
Ceiling cutout [mm]	68
Ceiling thickness [mm]	32
Recess depth [mm]	100
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,23
Color lamp	black matt
RAL	9005
EAN-Number	9008905740374
Lifetime [h]	L80 B10 50 000

**LIGHT DISTRIBUTION CURVE**

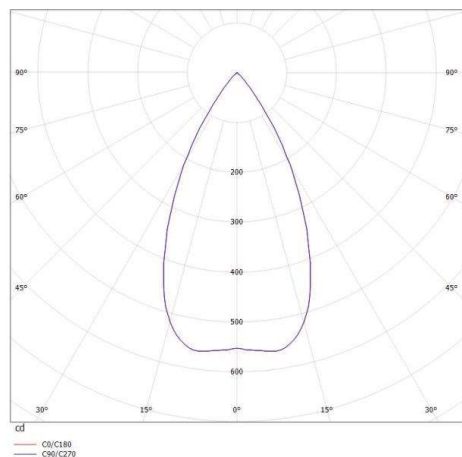

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.