


DASH DC


676-00300014345b

DASH DC VOLARE TRACK SPOTLIGHT WITH 2 PH VOLARE ADAPTER made of aluminium, white matt, similar to RAL 9016,high-efficiently vacuum deposited aluminium reflector beam 20°, light output direct, swiveling 350°, tilting 90°, with converter, max. 400mA, dimmable Smart bluetooth, adapter/ceiling base silver grey matt, IP20

DRAWING

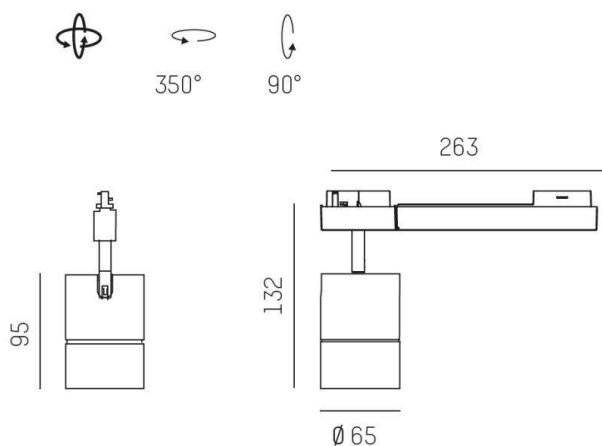

LIGHT DISTRIBUTION CURVE

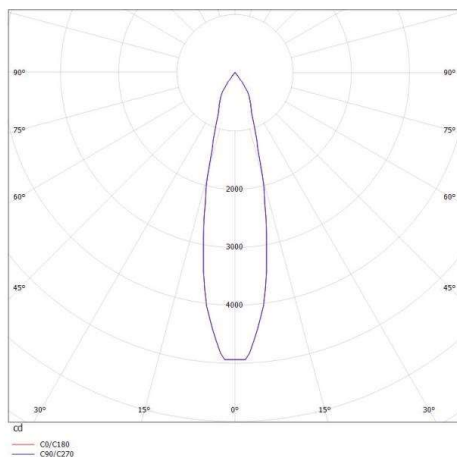

TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1430
Current sec. [mA]	400
Colour temp. [K]	2700K
CRI	PREMIUM>90
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	with converter
Dimming	Smart bluetooth
Light output	direct
Beam angle [°]	20°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	263
Height [mm]	132
Diameter [mm]	65
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,50
Color lamp	white matt
RAL	9016
Color adapter/ceiling base	silver grey matt
EAN-Number	9010506287554
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	27



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.